

4.0mm Contact Spacing, Battery Connectors

EIO-CE22 SERIES

■ FEATURES

- 4.0mm contact spacing.
- No. of contacts: 3pin.
- Available in tube type for automatic mounting.

■ SPECIFICATIONS

1.ELECTRICAL

- Voltage rating: 200VAC
- Current rating: 1.5A
- Contact resistance: 25mΩ max.
- Insulation resistance: 1000MΩ min.

2.MECHANICAL

- Durability: Mate & Unmate with applicability for 5000 times, Contact resistance: 25mΩ max.(initial), 40mΩ max.(final).
- Normal Force: 0.15 kgf*n (1.47N*n) min.
- Terminal Retention Force: 0.1kgf (0.98N) min.

■ MATERIALS

1.MATERIAL

- Contacts: Copper Alloy
- Insulator Housing:
High Temp. Thermoplastic

2.PLATING

Contact:

- Nickel In All Area
- Contact area: Au over Nickel
- Solder area: Tin over Nickel (RoHS Compliance)

■ PACKING

1.Packing method


1-1.All connector are packed in tube method.

2.Information on label (stuck to each ploy bag, reel and box)

- | | | | |
|--------------|------------------|--------------|--------------|
| (1)Part NO. | (2)Section. | (3)Lot NO. | (4)Quantity. |
| (5)QC stamp. | (6)Reprocess NO. | (7)ECE mark. | |

■ PART NUMBERING SYSTEM

EIO-CE22-S 003 V 5-2Z-T

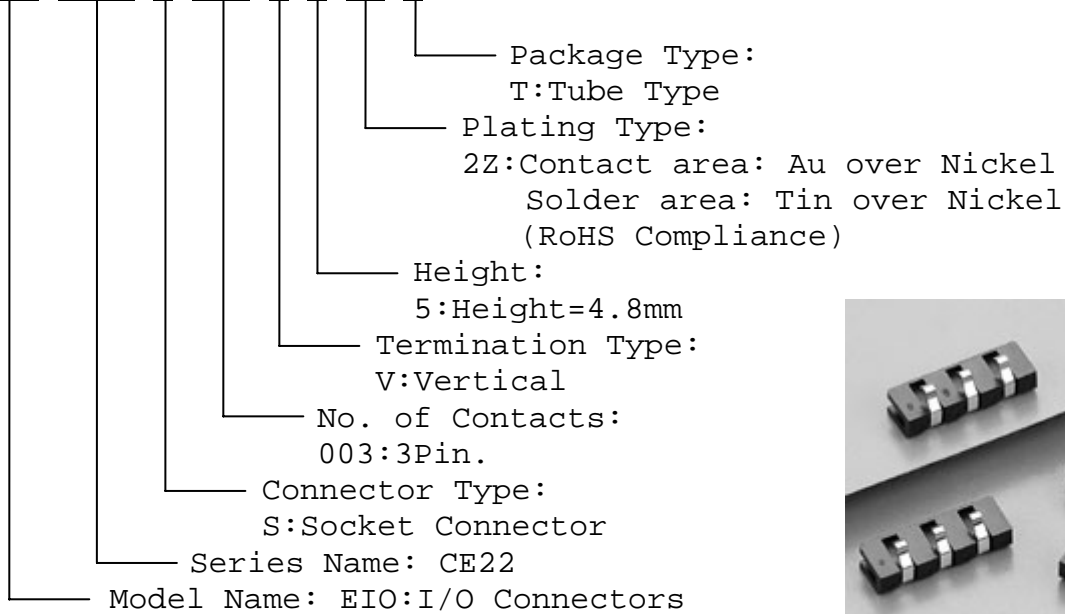

■ DRAWING

EIO-CE22-P003V5-2Z(RoHS Compliance) UNIT:mm
Connection Style: Right Angle SMT

