





SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□		
		REV.	20180914-A	PAGE	1	

I . Configuration and dimensions :



(PCB Pattern)

Unit : m/m


A	B	C	D	E	F	G	H
7.30 ±0.2	7.30 ±0.2	3.50 ±0.2	2.00 typ.	4.60 typ.	4.80 ref.	2.40 ref.	1.50 ref.

II . Description :

- a . Ferrite drum core construction
- b . Magnetically shielded
- c . Enamelled copper wire : H class
- d . Product weight : 0.63 g (ref.)
- e . Moisture sensitivity Level 1
- f . Products comply with RoHS' requirements
- g . Halogen free

III . General specification :

- a . Storage temp. : -40°C-----+125°C
- b . Operating temp. : -40°C-----+125°C
(Temp. rise included)
- c . Resistance to solder heat : 250°C.10 secs.

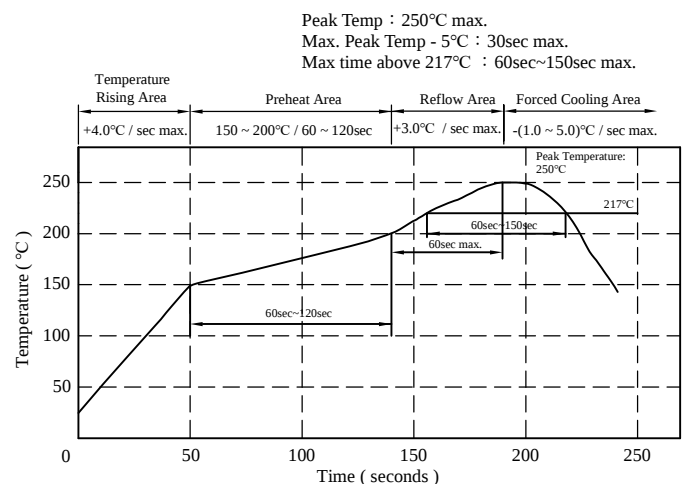

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□		
		REV.	20180914-A	PAGE	2	

IV . Electrical characteristics :

DWG No.	Inductance (uH)	Test Freq. (Hz)	RDC (Ω) max.	Isat (A)	Irms (A)
BS0703100MS□-□□□	10.0 ±20%	1k/1V	0.072	1.85	2.10
BS0703120MS□-□□□	12.0 ±20%	1k/1V	0.085	1.60	1.90
BS0703150MS□-□□□	15.0 ±20%	1k/1V	0.105	1.52	1.60
BS0703180MS□-□□□	18.0 ±20%	1k/1V	0.125	1.40	1.40
BS0703220MS□-□□□	22.0 ±20%	1k/1V	0.160	1.28	1.20
BS0703270MS□-□□□	27.0 ±20%	1k/1V	0.185	1.15	1.10
BS0703330MS□-□□□	33.0 ±20%	1k/1V	0.220	1.04	1.00
BS0703390MS□-□□□	39.0 ±20%	1k/1V	0.250	0.96	0.95
BS0703470MS□-□□□	47.0 ±20%	1k/1V	0.320	0.88	0.85
BS0703560MS□-□□□	56.0 ±20%	1k/1V	0.350	0.80	0.78
BS0703680MS□-□□□	68.0 ±20%	1k/1V	0.400	0.74	0.72
BS0703820MS□-□□□	82.0 ±20%	1k/1V	0.480	0.65	0.63
BS0703101MS□-□□□	100.0 ±20%	1k/1V	0.630	0.60	0.54
BS0703121MS□-□□□	120.0 ±20%	1k/1V	0.720	0.55	0.53
BS0703151MS□-□□□	150.0 ±20%	1k/1V	0.930	0.48	0.47
BS0703181MS□-□□□	180.0 ±20%	1k/1V	1.150	0.45	0.43
BS0703221MS□-□□□	220.0 ±20%	1k/1V	1.320	0.42	0.40
BS0703271MS□-□□□	270.0 ±20%	1k/1V	1.700	0.38	0.37
BS0703331MS□-□□□	330.0 ±20%	1k/1V	2.000	0.33	0.33
BS0703391MS□-□□□	390.0 ±20%	1k/1V	2.300	0.30	0.30
BS0703471MS□-□□□	470.0 ±20%	1k/1V	2.800	0.27	0.26
BS0703561MS□-□□□	560.0 ±20%	1k/1V	3.500	0.25	0.23
BS0703681MS□-□□□	680.0 ±20%	1k/1V	4.000	0.22	0.21
BS0703821MS□-□□□	820.0 ±20%	1k/1V	5.200	0.21	0.19
BS0703102MS□-□□□	1000.0 ±20%	1k/1V	5.800	0.18	0.17

- 1). Electrical specifications at 25°C
- 2). Inductance Test Freq :1kHz /1V
- 3). Isat base on $\Delta L / L0A=25\%$ max.(Approximately transient current)
- 4). Irms base on Temp. rise 40°C max.



SPECIFICATION FOR APPROVAL

REF. :



PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□		
		REV.	20180914-A	PAGE	3	

V . Curve :



BS0703100MS□

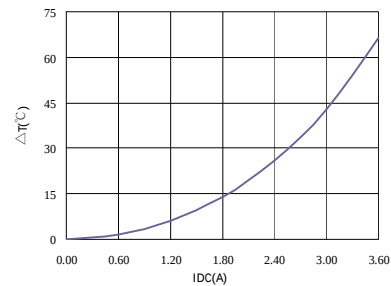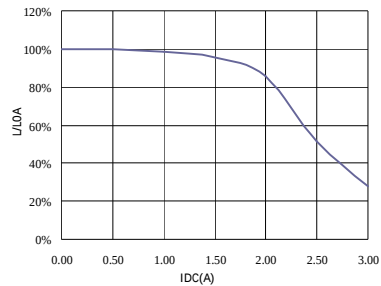



BS0703101MS□

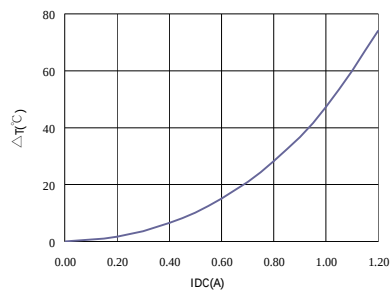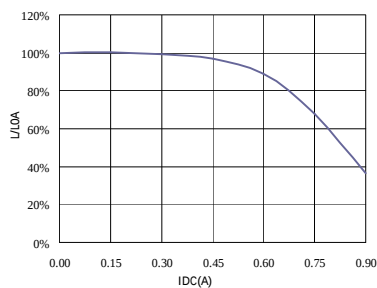

BS0703331MS□

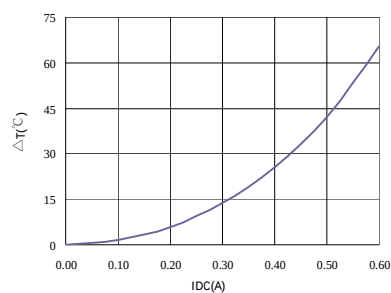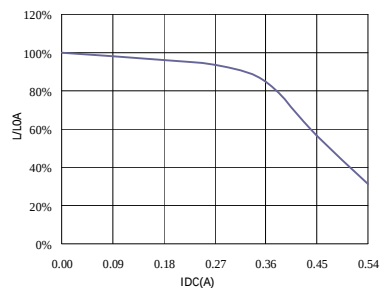

BS0703102MS□

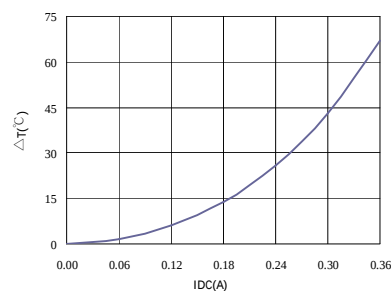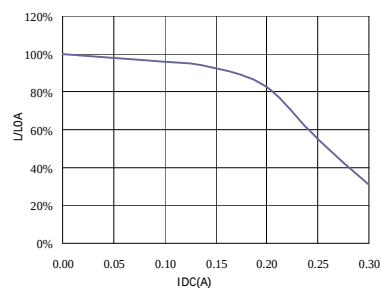

AR-001C



SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□	
		REV.	20180914-A	PAGE	4

VI . Packaging information :

(1) Configuration

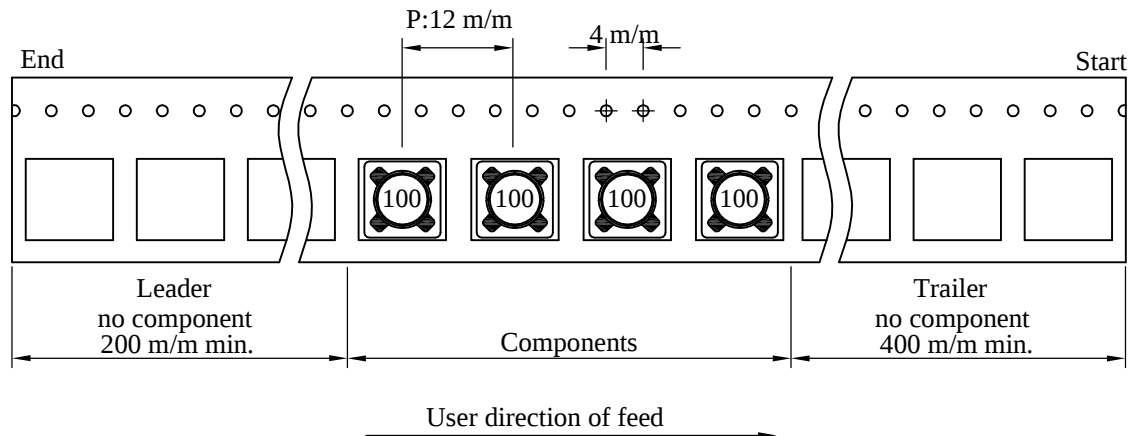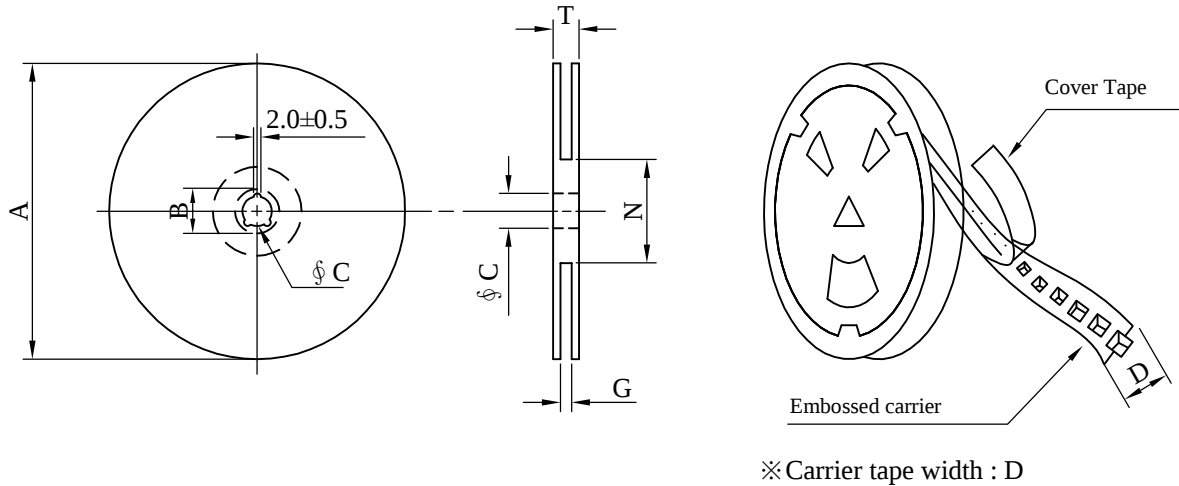

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 16	330	21±0.8	13±0.5	16	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. Per package

Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (g)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
B	1,500	1390	13 - 16	9,000	9.6	38 x 37 x 22


AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□		
		REV.	20180914-A	PAGE	5	

VII . Drawing number expression :

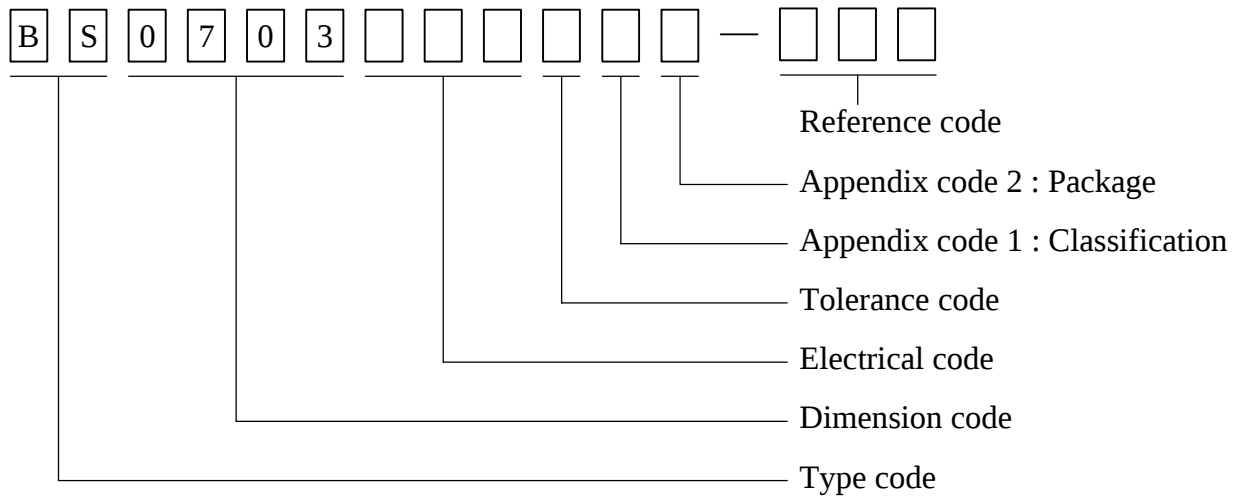

Appendix code 1 : Product Classification

Appendix code 2 : Package Information

Code	Inner package	Cover tape	Carrie tape	Bag	Package Q'TY	Remark
B	T /R (Reel package)	UCT	Antistatic	Antistatic	1,500 pcs	

AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□	
		REV.	20180914-A	PAGE	6

VIII . Reliability test :

Item	Reference documents	Test Condition	Test Specification
1.High Temperature Exposure	MIL-STD-202 Method 108	1.Temperature: 125±2°C 2.Time:96±2 hours.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
2.Temperature Cycling	JESD22-A 104	1.Temperature: -40°C ~ +125°C 2.Number of cycle:100 cycle 3.Dwell time:30 minutes	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
3.Biased Humidity Test	MIL-STD-202 Method 103	1.Temperature : 85±2 °C 2.Humidity: 85% RH. 3.Time:96±2 Hours	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
4.Operational Life	JESD22-A 108	1.Temperature: 125°C(Temp. rise included) 2.Time:96±2 hours. 3.Rated current :	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
5.External Visual	JESD22-B 101 & MIL-STD-883 Method 2009	Inspect product constructions, marking and workmanship.	1.No pollution on the surface of products. 2.Clear marking. 3.No crack.
6.Physical Dimensions	JESD22-B 100	Verify physical dimensions to the applicable product detail specification.	Per product specification standard
7.Resistance to solvents	MIL-STD-202 Method 215	Immerse into solvent for 3±0.5 minutes & brush 10 times for 3 cycles.	1.No body change in apperarence. 2.No marking blurred. 3.Inductance shall not change more than ±20%.
8.Vibration Test	MIL-STD-202 Method 204	1.Frequency and Amplitued : 10-2000-10 Hz, 1.5 mm. 2.Direction:X, Y, Z 3.Test duration:2 hours for each direction, 6 hours in total.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
9.Resistance To Soldering Heat Test	MIL-STD-202 Method 210 & J-STD020D.1	1.Highest temperature : 250±5°C. 2.Time (temp.≥ 217°C) : 60~150 Second. 3.IR reflow times : 3 times.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
10.Saturation Current	JIS C 6436 & User SPEC.	1.Applied rated current for 5 seconds. 2.Saturation current :	Inductance shall not drop more than 25% max.
11.Over load	JIS C 6436 & User SPEC.	1.Applied one and half rated current for a period of 5 minutes. 2.Rated current :	No electrical or mechanical damage
12.Temperature Rise Current	JIS C 6436 & User SPEC.	1.Applied rated current for 10 minutes. 2.Temperature measure by digital surface thermometer. 3.Irms current :	Surface temperature rise is less than 40°C max.
13.Solderability Test	J-STD-002 & JESD22-B 102	1.Baking in pre-testing : 150±5°C / 16Hours±30 min. 2.Peak temperature : 240±5°C 3.Time (temp.≥217°C) : 60~150 seconds. 4.IR reflow times : 1 time.	More than 95% soldering coverage min. on terminations.
14.Electrical Characteriazation	MIL-STD-202 Method 304 & User SPEC.	1.Operating temperature : -40°C~125°C 2.Room temperature : 25°C.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±20%.
15.Drop	CNS-C6354 & GB/T 2423.8	1.Products shall be mounted on SPEC. pcb and dropped down from the height of 1m 2.Drop total times : 6 times (Every side of sample drop 2 times)	1. Adhesion on PCB shall be enough. 2. Product appearance shall not break. 3. No electrical damage.
16.Terminal Strength Test	IEC 60068-2-21	1.Apply push force to samples mounted on PCB. 2.Force of 1.8 kg for 60±1 seconds.	After test, inductors shall be no mechanical damage.

AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		BS0703□□□□S□-□□□		
		REV.	20180914-A		PAGE	7

IX . Change history :

DATE/REV.	DISCRIPTION	DRAWN	CHECKED	APPROVED
20180914-A	Preliminary Release	Mingliang Xu	Weini Wang	Lock

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP