

600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Features

- High isolation 5000 VRMS
- Peak Breakdown Voltage
 - 600V CT3061,3062,3063
 - 800V CT3081,3082,3083
- Temperature range 55 ℃ to 100 ℃
- Regulatory Approvals
 - UL UL1577 (E364000)
 - VDE EN60747-5-5(VDE0884-5)
 - CQC GB4943.1, GB8898
 - IEC60065, IEC60950

Applications


- Motor Controls
- Lamp ballasts
- Static AC Power Switch
- Solenoid/ Valve Control

Description

The CT3061, CT3062, CT3063, CT3081, CT3082 and CT3083 series consists of a Zero Cross Photo Triac optically coupled to a gallium arsenide Infrared-emitting diode in a 6-lead DIP package with different lead forming options.

Package Outline

Schematic

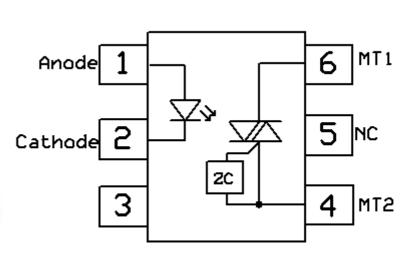

Note: Different lead forming options available. See package dimension.



600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Absolute Maximum Rating at 25°C

Symbol	Parameters	Ratings	Units	Notes			
Viso	Isolation voltage		5000	V _{RMS}			
Topr	Operating temperature		-55 ~ +100	°C			
Tstg	Storage temperature		-55 ~ +150	°C			
Tsol	Soldering temperature		260	°C			
Emitter							
lF	Forward current		60	mA			
I _{F(TRANS)}	Peak transient current (≤1µs P.W,300pps)		1	Α			
V _R	Reverse voltage		6	V			
P _D	Power dissipation		100	mW			
Detector	Detector						
P _D	Power dissipation		300	mW			
N/	Off State Output Townsing Voltage	CT3061,3062,3063	600	V			
V _{DRM}	Off-State Output Terminal Voltage	CT3081,3082,3083	800	V			
I _{TSM}	Peak Repetitive Surge Current	1	Α				

600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Electrical Characteristics $T_A = 25 \, ^{\circ}\text{C}$ (unless otherwise specified)

Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Тур	Max	Units	Notes
VF	Forward voltage	I _F =10mA		-	1.5	٧	
IR	Reverse Current	V _R = 6V	-	-	5	μΑ	
C _{IN}	Input Capacitance	f= 1MHz	-	45	-	pF	

Detector Characteristics

Symbol	Param	eters	Test Conditions	Min	Тур	Max	Units	Notes
1	Peak Blocking CT3061,62,63				500	^		
IDRM1	Current	CT3081,82,83	I _F = 0mA, V _{DRM} = Rated V _{DRM}	-	-	500	nA	
lanu.	Inhibit Leakage Current		I _F = Rated I _{FT} , V _{DRM} = Rated	-		500	μΑ	
DRM2			V _{DRM}		-			
V _{INH}	Inhibit Voltage		I _F = Rated I _{FT} ,	-	-	20	٧	
V_{TM}	Peak On-State Voltage		I _F = Rated I _{FT} , I _{TM} = 100mA	-	-	3	٧	
	Critical Rate of	CT3061,62,63		1000	-	-		
dv/dt	Rise off-State	CT3081,82,83	VPEAK= Rated VDRM	000	-	-	V/μs	
	Voltage			600				


Transfer Characteristics


Symbol	Parameters		Test Conditions	Min	Тур	Max	Units	Notes
	Input	CT3061, CT3081		-	-	15		
I _{FT}	Trigger	CT3062, CT3082	Terminal Voltage = 3V	-	-	10	mA	
	Current	CT3063, CT3083		-	-	5		
lн	Holding Current			-	380	-	μΑ	
Rio	Isolation Resistance		V _{IO} = 500V _{DC}	1x10 ¹¹	-	-		
Сю	Isolation Capacitance		f= 1MHz	-	0.25	-	pF	





600V/800V Zero Cross 6-Pin Phototriac Optocoupler


Typical Characteristic Curve

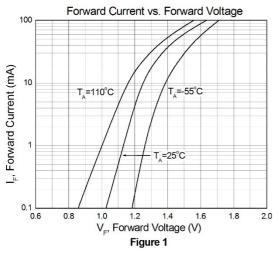


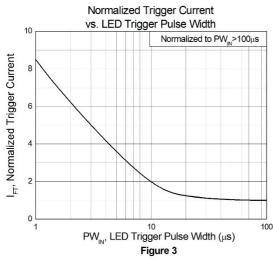

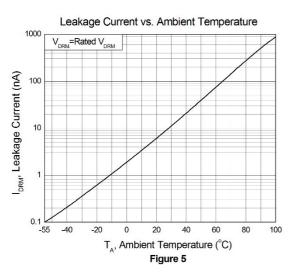

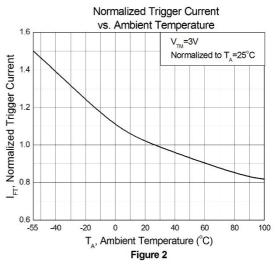


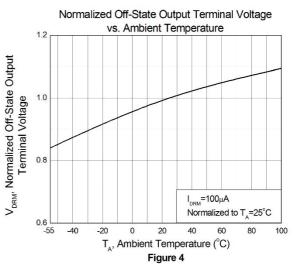


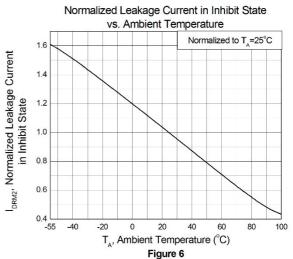




600V/800V Zero Cross 6-Pin Phototriac Optocoupler

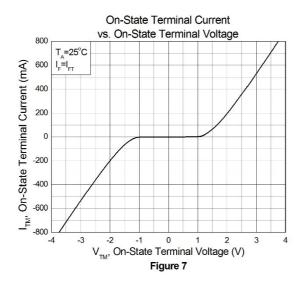

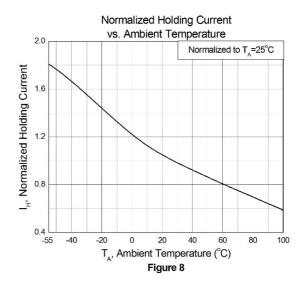


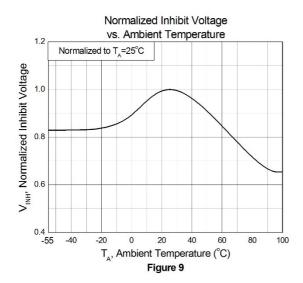


600V/800V Zero Cross 6-Pin Phototriac Optocoupler


Package Dimension Dimensions in mm unless otherwise stated

Standard DIP - Through Hole



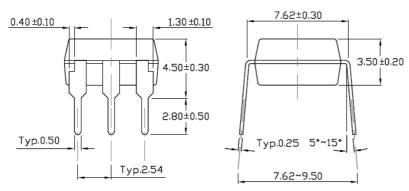


Wide Lead Forming – Through Hole (M Type)

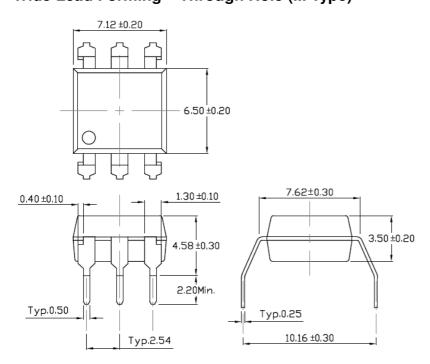





600V/800V Zero Cross 6-Pin Phototriac Optocoupler


Surface Mount Forming (S Type)







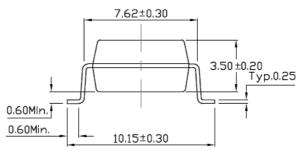

Surface Mount Forming (Low Profile) (SL Type)






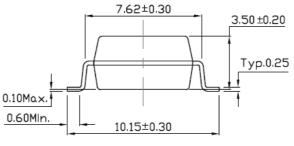


600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Recommended Solder Mask Dimensions in mm unless otherwise stated

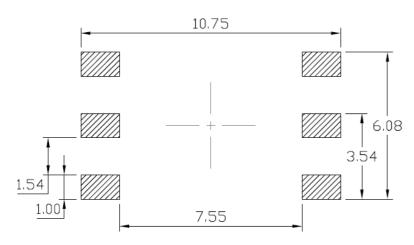

Marking Information



Note:

CT : Denotes "CT Micro"

3061 : Part NumberV : VDE OptionY : Fiscal YearWW : Work Week

K : Manufacturing Code

600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Ordering Information

CT306X(Y)(Z)-G, CT308X(Y)(Z)-G

X = Part No.(X=1,2,3)

Y = Lead form option (S, SL, M or none)

Z = Tape and reel option (T1, T2 or none)

G= Material option (G: Green, None: Non-green)

Option	Option Description	
None	None Standard 6 Pin Dip	
М	Gullwing (400mil) Lead Forming	50Units/Tube
S(T1)	Surface Mount Lead Forming – With Option 1 Taping	1000 Units/Reel
S(T2)	Surface Mount Lead Forming – With Option 2 Taping	1000 Units/Reel
SL(T1)	Surface Mount (Low Profile) Lead Forming- With Option 1 Taping	1000 Units/Reel
SL(T2)	Surface Mount (Low Profile) Lead Forming – With Option 2 Taping	1000 Units/Reel



4,80

600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Carrier Tape Specifications Dimensions in mm unless otherwise stated

Option S(T1) & SL(T1)


-12.00

Option S(T2) & SL(T2)



600V/800V Zero Cross 6-Pin Phototriac Optocoupler

Reflow Profile

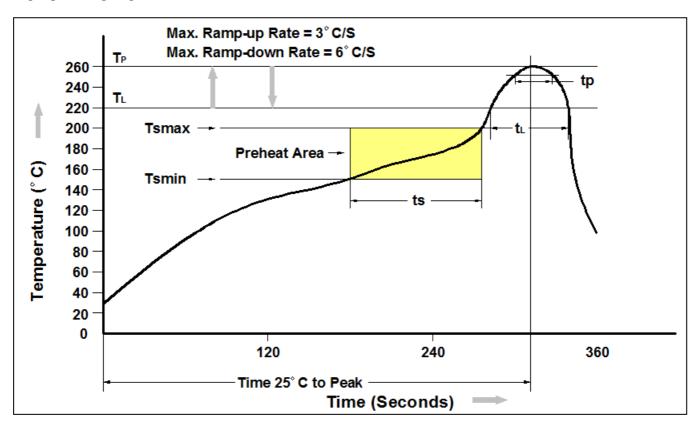

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	150℃
Temperature Max. (Tsmax)	200℃
Time (ts) from (Tsmin to Tsmax)	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.
Liquidous Temperature (T _L)	217℃
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260℃ +0℃ / -5℃
Time (t _P) within 5 °C of 260 °C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25℃ to Peak Temperature	8 minutes max.



600V/800V Zero Cross 6-Pin Phototriac Optocoupler

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.