ULTRA LOW CAPACITANCE STEERING DIODE/TVS ARRAY



DESCRIPTION

The PLR0506LC is an ultra low capacitance steering diode/TVS array. This device is designed to protect high-speed data ports such as USB3.1-Type C, HDMI1.4 and HDMI2.0 against ESD and surge transient voltage events. The PLR0506LC offers integral protection for 6 rail-to-rail data lines, making the devices the best solution within minimal board space.

This device meets the IEC 61000-4-2 (ESD), 61000-4-2 (EFT) and 61000-4-5 (Surge) requirements. The typical capacitance I/O to ground is 0.4pF and I/O to I/O 0.25pF at 0Vdcc, 1MHz.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air ±15kV, Contact ±8kV
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- Compatible with IEC 61000-4-5 (Lightning): 4A 8/20μs
- ESD Protection > 25 kilovolts
- Low Clamping Voltage 22V @ 4A
- Protects 6 Lines
- Ultra Low Capacitance : 0.25pF Typical(I/O to I/O)
- RoHS Compliant
- REACH Compliant


MECHANICAL CHARACTERISTICS


- Molded JEDEC DFN-8 Package
- Approximate Weight: 7 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
- Pure-Tin Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

APPLICATIONS

- Gigabit Ethernet
- HDMI1.4 and HDMI 2.0
- USB3.1 Type C
- High-speed Data Line ESD Protection
- FireWire, SATA, PCIe Interfaces

CIRCUIT DIAGRAM & PIN CONFIGURATION






TYPICAL DEVICE CHARACTERISTICS


05624


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER SYMBOL VALUE UNIT							
Peak Pulse Power (tp = 8/20µs)	P _{PP}	64	Watts				
Operating Temperature	TL	-55 to 150	°C				
Storage Temperature	T _{stg}	-55 to 150	°C				

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE (Note 1)	MAXIMUM CLAMPING VOLTAGE (Fig. 1) (Note 1)	MAXIMUM CLAMPING VOLTAGE (Fig. 1) (Note 1)	MAXIMUM LEAKAGE CURRENT (Note 1)	MAXIMUM CAPACITANCE (Note 1)	
		V _{wm} VOLTS	@ 1mA V _(BR) VOLTS	@ I _p = 1A V _c VOLTS	@ I _p = 4A V _c VOLTS	@V _{wM} Ι _D μΑ	@0V, 1MHz C _{J(SD)} pF	
PLR0506LC	506LC	5.0	6.0	12.0	16.0	0.1	0.4	
NOTE 1. From I/O Pin to ground.								

TYPICAL DEVICE CHARACTERISTICS

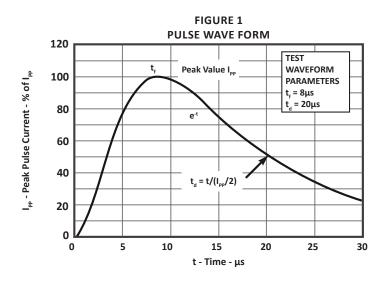

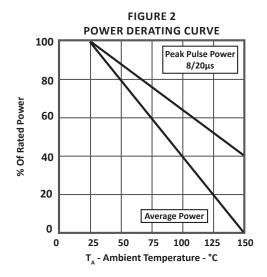


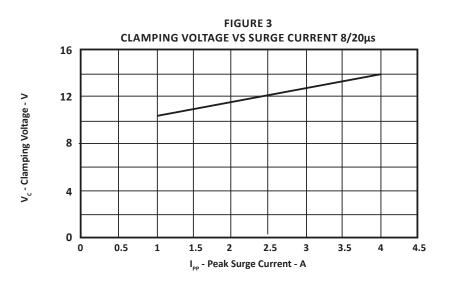


DFN-8 PACKAGE INFORMATION


05624

OUTLINE DIMENSIONS							
DIM	MILLIMETERS		INC	HES			
DIN	MIN	MAX	MIN	MAX			
А	3.224	3.376	0.127	0.133			
В	1.224	1.376	0.048	0.054			
С	1.2	.50	0.049				
D	0.544	0.696	0.021	0.133			
E	0.200	-	0.008	-			
F	0.200 0.300		0.008	0.012			
G	0.5	00	0.0	20			
н	0.304	0.456	0.012	0.018			
J	0.381	0.457	0.015	0.018			
К	0.000 0.050		0.000	0.002			
L	0.1	.27	0.0	005			
NOTES 1. Controlling dimension: millimeters.							




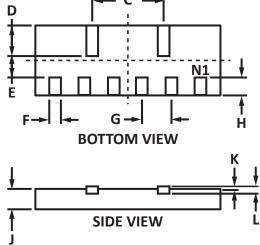

PAD LAYOUT DIMENSIONS						
DIM	MILLIMETERS	INCHES				
DIIVI	NOMINAL	NOMINAL				
С	1.05	0.041				
G	0.25	0.010				
Р	0.50	0.020				
P1	1.25	0.049				
х	0.30	0.012				
Y	0.68	0.027				
Y1	0.92	0.036				
Z	1.85	0.073				
NOTES 1. Controlling dimension: millimeters.						

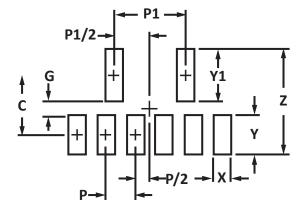

TAPE AND REEL

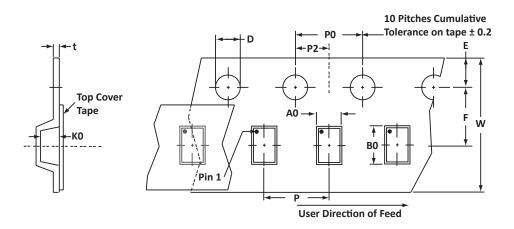

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	BO	ко	D	E	F	W	PO	P2	Р	tmax
178mm (7")	8mm	1.81 ± 0.10	3.51 ± 0.10	0.55 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25
NOTES	NOTES 1. Dimensions are in millimeters.											

Surface mount product is taped and reeled in accordance with EIA-481.

3. Suffix - T73 = 7" Reel - 3,000 pieces per 8mm tape.

4. Marking on Part - marking code (see page 2) and pin 1 dot.

ORDERING INFORMATION							
BASE PART NUMBER	T NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QTY						
PLR0506LC	n/a	-T73	3,000	7″	n/a		
This device is only available in a Lead-Free configuration.							

COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices[™] is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

CONTACT US

Corporate Headquarters

2929 South Fair Lane Tempe, Arizona 85282 USA

By Telephone

General: 602-431-8101 Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114 Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: <u>asiasales@protekdevices.com</u> Europe Sales: <u>europesales@protekdevices.com</u> U.S. Sales: <u>ussales@protekdevices.com</u> Distributor Sales: <u>distysales@protekdevices.com</u> Customer Service: <u>service@protekdevices.com</u> Technical Support: <u>support@protekdevices.com</u>

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19 Zervex Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2020 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.