
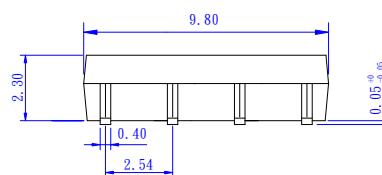
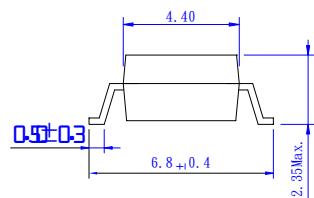
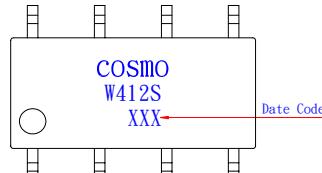


# PRODUCT SPECIFICATION

DATE : 09/01/2006



<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 1 OF 7	

## ● OUTSIDE DIMENSION :



Unit : mm  
Tolerance : ±0.2mm

## ● Operate / Reverse time

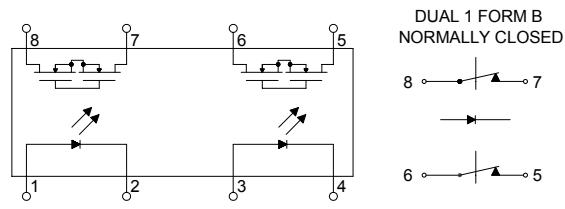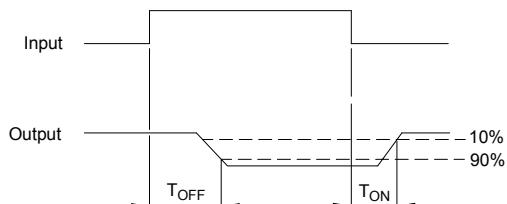

## ● Absolute Maximum Ratings

( Ta=25°C )

Emitter (Input)	Detector (Output)
Reverse Voltage ..... 5.0V	Output Breakdown Voltage ..... ± 60V
Continuous Forward Current ..... 50mA	Continuous Load Current ..... ± 200mA
Peak Forward Current ..... 1A	Power Dissipation ..... 500mW
Power Dissipation ..... 100mW	
Derate Linearly from 25°C ..... 1.3mW/°C	

## General Characteristics

Isolation Test Voltage ..... 1500VACrms	Storage Temperature Range ..... -40°C to +125°C
Isolation Resistance ..... Viso=500V, Ta=25°C ..... $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
Total Power Dissipation ..... 550mW	Junction Temperature ..... 100°C
Derate Linearly from 25°C ..... 2.5mW/°C	Soldering Temperature , 2mm from case , 10 sec ..... 260°C

# PRODUCT SPECIFICATION

DATE : 09/01/2006




<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 2 OF 7	

## ● Electro-optical Characteristics

( Ta=25°C )

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter ( Input )						
Forward Voltage	$V_F$	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	$I_{F_{OFF}}$	$V_L=\pm 20\text{V}$ , $I_L \leq 5\mu\text{A}$		5		mA
Recovery Input Current	$I_{F_{ON}}$	$V_L=\pm 20\text{V}$ , $I_L=100\text{mA}$ , $t=10\text{mS}$	0.2			mA
Detector ( Output )						
Output Breakdown Voltage	$V_B$	$I_B=50\mu\text{A}$	60			V
Output Off-State Leakage	$I_{T_{OFF}}$	$V_T=100\text{V}$ , $I_F=10\text{mA}$		0.2	2	$\mu\text{A}$
I/O Capacitance	$C_{ISO}$	$I_F=0$ , $f=1\text{MHz}$		6		pF
ON Resistance	Connection	$R_{ON}$	$I_L=100\text{mA}$ , $I_F=0\text{mA}$	2.5	5	$\Omega$
				1.25	2.5	
				0.63	1.25	
Operate Time	$T_{OFF}$	$I_F=10\text{mA}$ , $V_L=\pm 20\text{V}$ $t=10\text{ms}$ , $I_L=\pm 100\text{mA}$		0.6	1.5	ms
Reverse Time	$T_{ON}$			0.3	1.5	ms

## ● MOS Relay Schematic and Wiring Diagrams

Schematic	Output configuration	Load	Connection	Wiring Diagrams
	2b	AC/DC	-	<p>(1) Two independent 1 Form B use</p>  <p>(2) 2 Form B use</p> 

# PRODUCT SPECIFICATION

DATE : 09/01/2006


<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 3 OF 7	

## ● Data Curve

Load current vs. ambient temperature

Allowable ambient temperature :

-40°C to +85°C

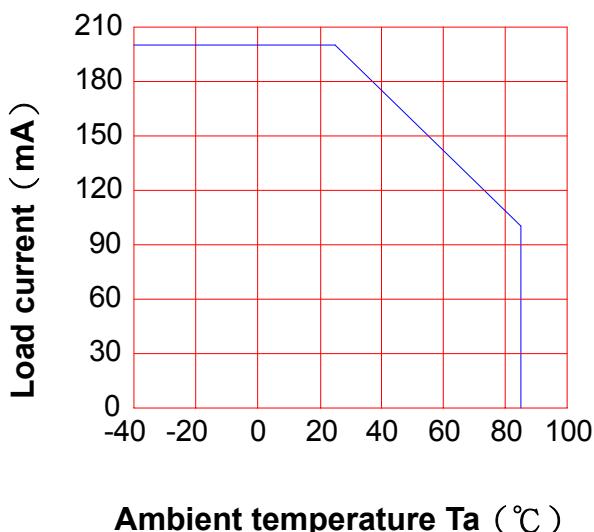


Ambient temperature Ta (°C)

On resistance vs. ambient temperature across terminals 5, 7 and 6, 8 pin

LED current : 5mA

Continuous load current : 200mA (DC)

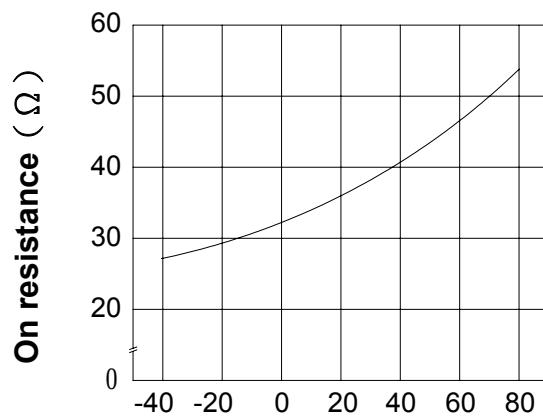


Ambient temperature Ta (°C)

Operate (OFF) time vs. ambient temperature

Load voltage 60V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

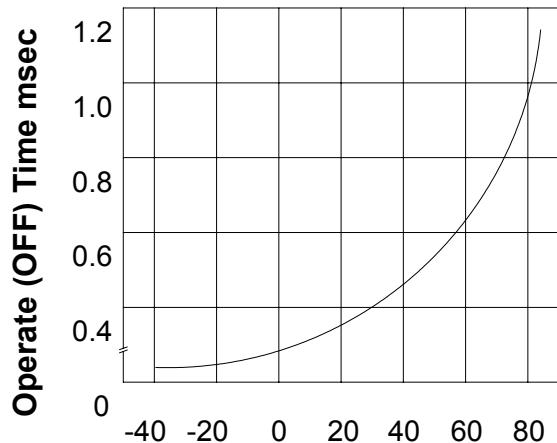


Ambient temperature Ta (°C)

Reverse (ON) time vs. ambient temperature

Load voltage 600V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

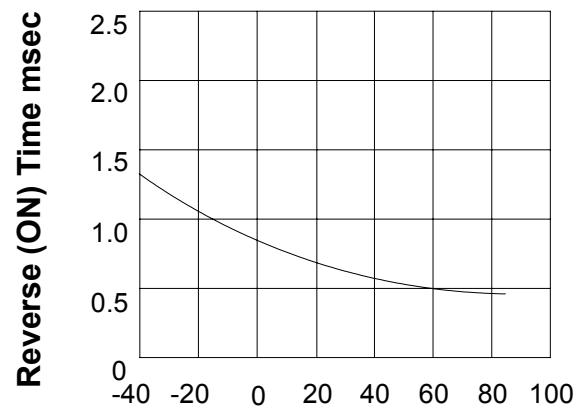


Ambient temperature Ta (°C)

# PRODUCT SPECIFICATION


DATE : 09/01/2006

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 4 OF 7	


LED operate (OFF) current vs.  
ambient temperature  
Load Voltage : 60V (DC)  
Continuous load current : 200mA (DC)

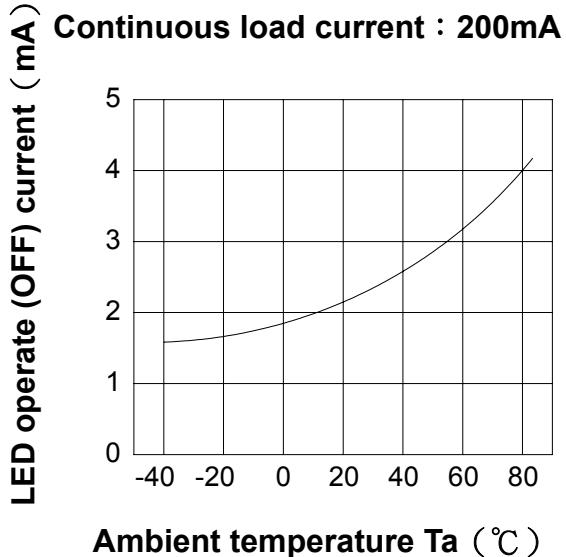


LED Reverse (ON) current vs.  
ambient temperature  
Load Voltage : 60V (DC)  
Continuous load current : 200mA (DC)

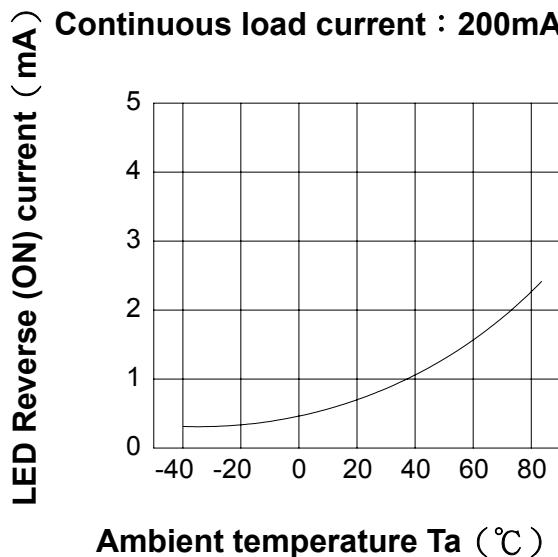

LED dropout voltage vs.  
ambient temperature  
LED current : 5 to 50mA

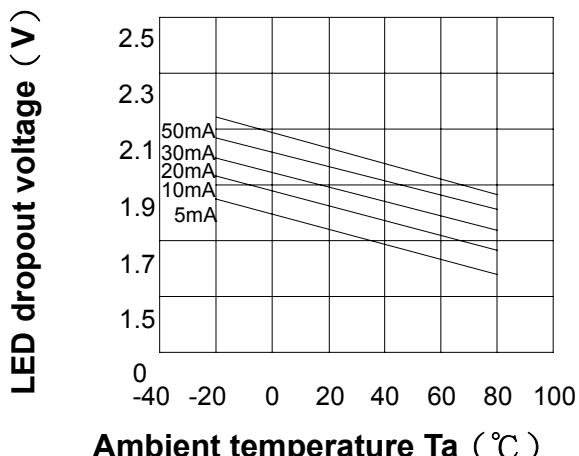

Voltage vs. current characteristics of  
output at MOSFET portion  
Measured portion : across terminals  
5 , 7 and 6 , 8 pin  
Ambient temperature : 25°C

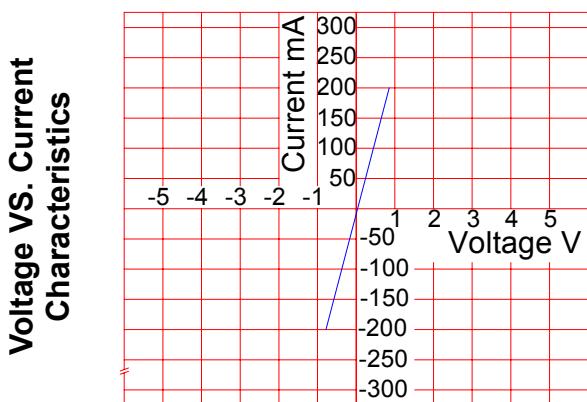


# PRODUCT SPECIFICATION


DATE : 09/01/2006

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 5 OF 7	


**LED forward current vs. Operate (OFF) time across terminals 5 , 7 and 6 , 8 pin**  
**Load voltage : 60V (DC)**  
**Continuous load current : 200mA (DC)**  
**Ambient temperature : 25°C**

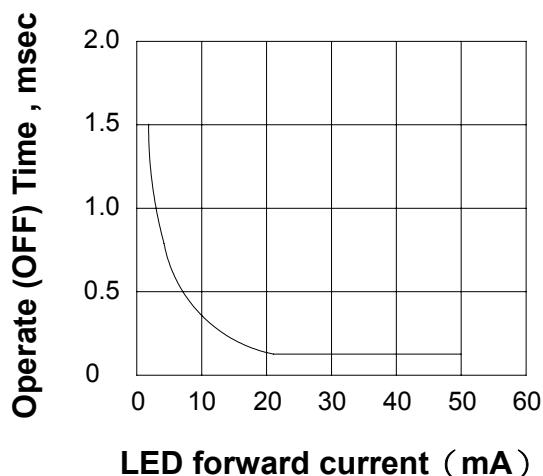


**Off state leakage current**  
**Across terminals 5 , 7 and 6 , 8 pin**  
**Ambient temperature : 25°C**

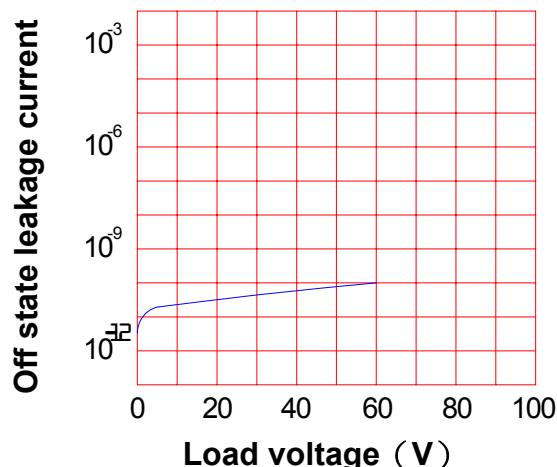

**LED forward current vs. Reverse (ON) time**  
**Across terminals 5 , 7 and 6 , 8 pin**  
**Load voltage : 60V (DC)**  
**Continuous load current : 200mA (DC)**  
**Ambient temperature : 25°C**

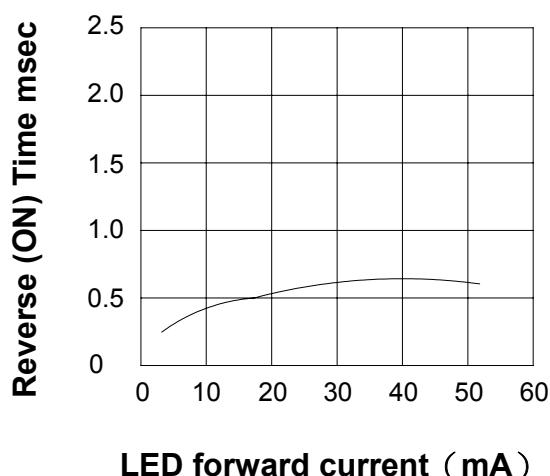

**Applied voltage vs. output capacitance**  
**Across terminals 5 , 7 and 6 , 8 pin**  
**Frequency : 1MHz**  
**Ambient temperature : 25°C**

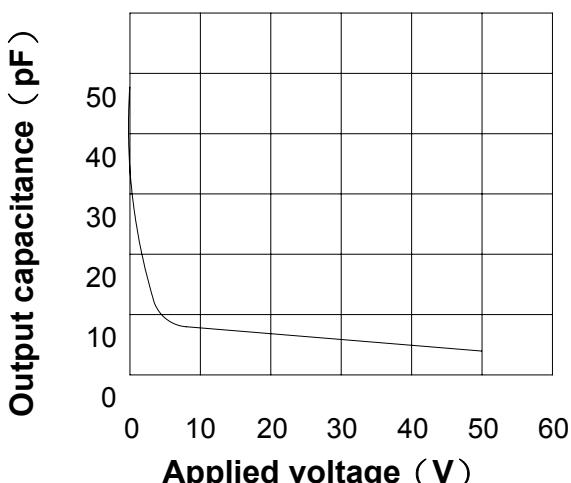

# PRODUCT SPECIFICATION

DATE : 09/01/2006


<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW412S</b>	NO.62M21004	VER. 1
		SHEET 6 OF 7	

## ● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

( IF=5mA )

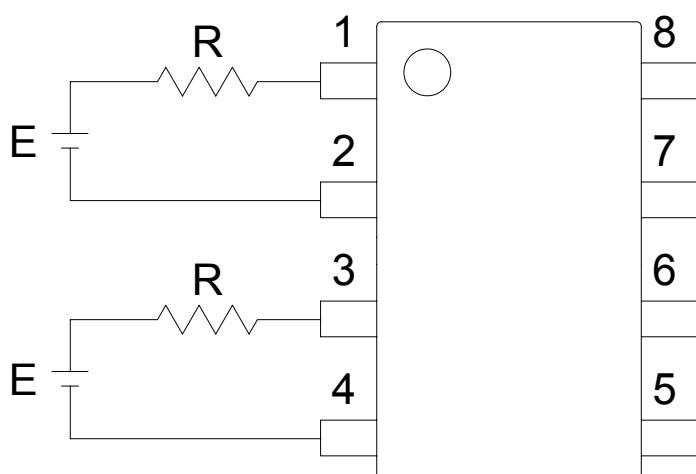

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

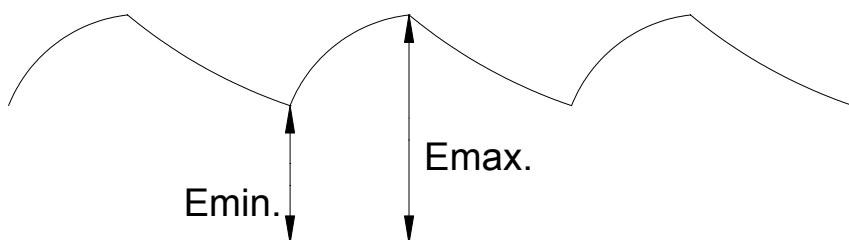

# PRODUCT SPECIFICATION

DATE : 09/01/2006

**cosmo**  
ELECTRONICS CORPORATION



SOLID STATE RELAY - MOSFET OUTPUT  
**KAQW412S**

NO.62M21004  
SHEET 7 OF 7

VER.  
1

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

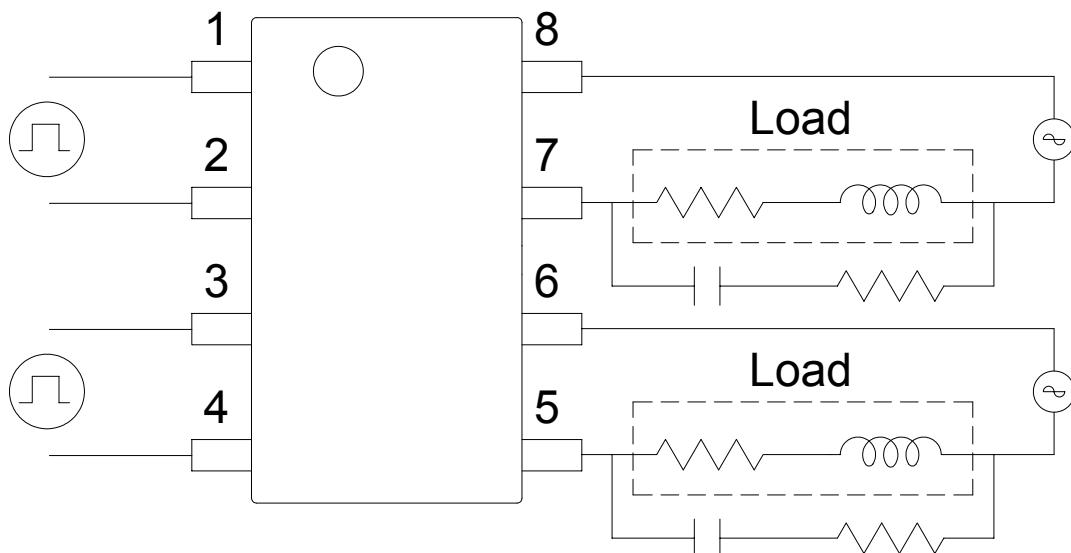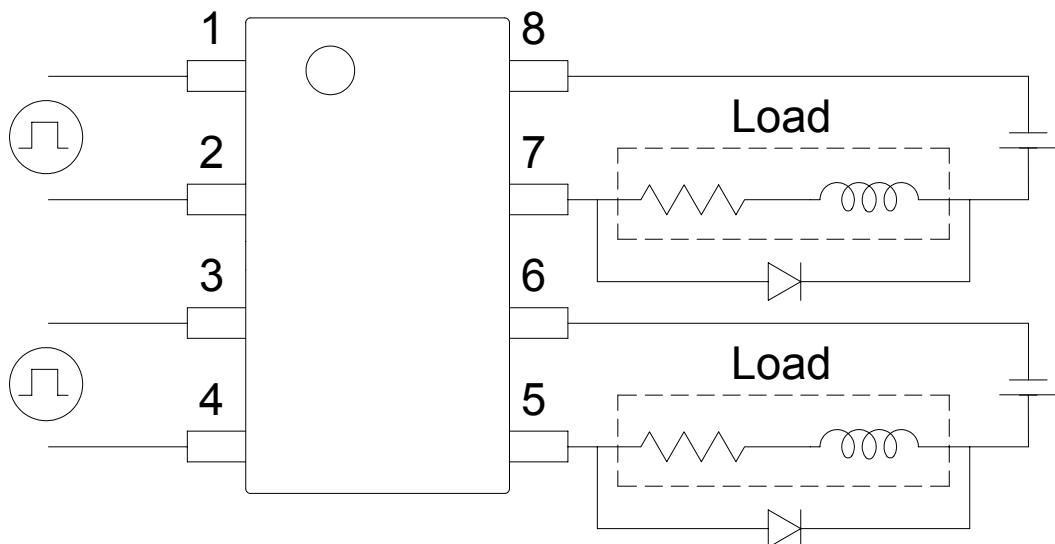

R-C Snubber